

EAC-30N1/N2

NVIDIA® Jetson Orin™ Nano AI Box



Features

- Powered by NVIDIA® Jetson Orin™ Nano
- Support Jetson Orin Nano Super Mode
- Onboard 4/8GB 64/128-bit LPDDR5
- Multiple I/O interface connections for data collection
- Gigabit LAN, USB 3.1, Serial Port, CAN-FD
- Wide operating temperature range -20°C to 60°C


Specifications

System	
CPU/GPU	NVIDIA® Jetson Orin™ Nano 6-core Arm® Cortex®-A78AE v8.2 64-bit CPU
Memory	Onboard 4/8GB 64/128-bit LPDDR5
Storage	1 x M.2 M-Key 2280, support NVMe
Real time clock	Yes
Indicators	LED indicator x 1 (Power)
Operating System	Linux(NVIDIA Jetpack 5.1.2/6.0/6.2)
Power Supply	
Power Requirement	9 to 36 VDC
Power Consumption	Max. 25W (with Fan)
MTBF (Hours)	--
Environmental and Mechanical	
Dimension	136mm x 110mm x 57mm
Weight	2.1 kg
Mouting/Installation	Din Rail, Wall Mount
Operating Temperature	-4 °F ~ 140 °F (-20 °C ~ 60 °C)
Storage Temperature	-40 °F ~ 176 °F (-40 °C ~ 85 °C)
Operating Humidity	10% ~ 95% relative humidity, non-condensing
Certification	
Regulations	CE, FCC, BSMI
Carrier	Planning

Interface	
Serial Port	1 x RS-485 with 5-pin Terminal Block
CAN Bus	1 x CAN-FD with 5-pin Terminal Block
Ethernet	1 x GbE LAN, RJ45 1 x 100M LAN, RJ45
USB	4 x USB 3.1, Type-A
DI/DO	--
AI/AO	--
Display	1 x HDMI 2.0-Out
Power Connector	3-pin Terminal Block
Debug Port	1 x Micro USB for console
Expansion Slot	1 x M.2 E-Key 2230 1 x M.2 B-Key 3052
Other Interface	--
SIM	1 x SIM card slot
Micro SD	--
Button	Power, Reset
Antenna	5 x Antenna

Dimension

Unit: mm / inch

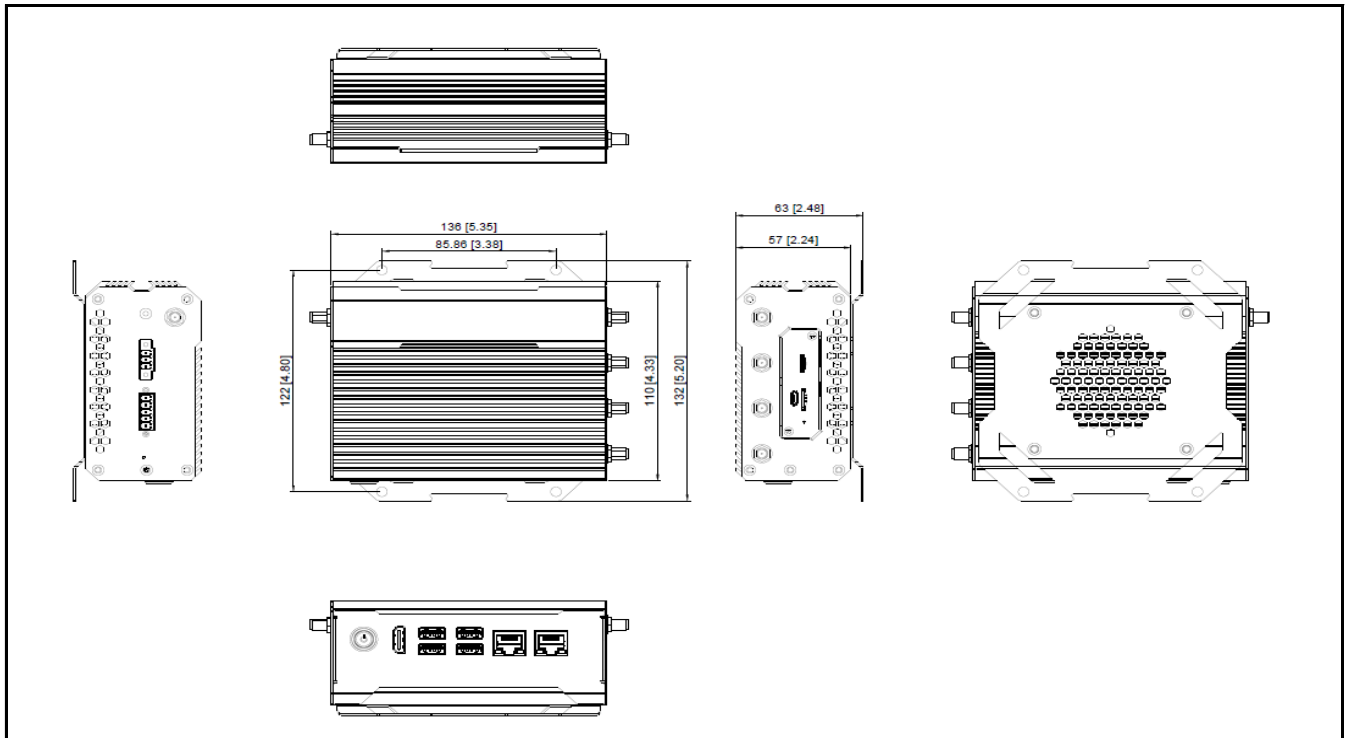

Ordering Information

Packing List

1 x EAC-30N1 BOX
 3-pin Terminal block Connector x1
 5-pin Terminal block Connector x1
 Wall Mount x1

Part Number

2ENRL00DAP0002R	NVIDIA® Jetson Orin™ Nano, 4GB, 9 to 36VDC
2ENRL00DAP0003R	NVIDIA® Jetson Orin™ Nano, 8GB, 9 to 36VDC
2ENVPJONAIIF2500-01	NVIDIA® Jetson Orin™ Nano, 4GB, 128GB NVMe, 9 to 36VDC
2ENVPJONAIIF3500-01	NVIDIA® Jetson Orin™ Nano, 8GB, 128GB NVMe, 9 to 36VDC

Optional Accessories

Part Number / Item

396CEAC3001	Adaptor IN:100-240V OUT:DC12V5A 60W 3Pin
4K02X00000030AR	Power Cord EU
4K02X00000020AR	Power Cord US
4710EM060KG5301	Quectel EM060K-GL 4G LTE, M.2 3042
4710RM520NG5301	Quectel RM520N-GL 5G NR, M.2 3052
4FP-MD00000	EnLi ENL-R8852BE WiFi 6 BT 5.2 M.2 2230